


Quick-Fit® Thread Adapters, Brass, Nickel plated

Used to adapt from metric external thread up to PG internal thread and from PG external thread up to metric internal thread

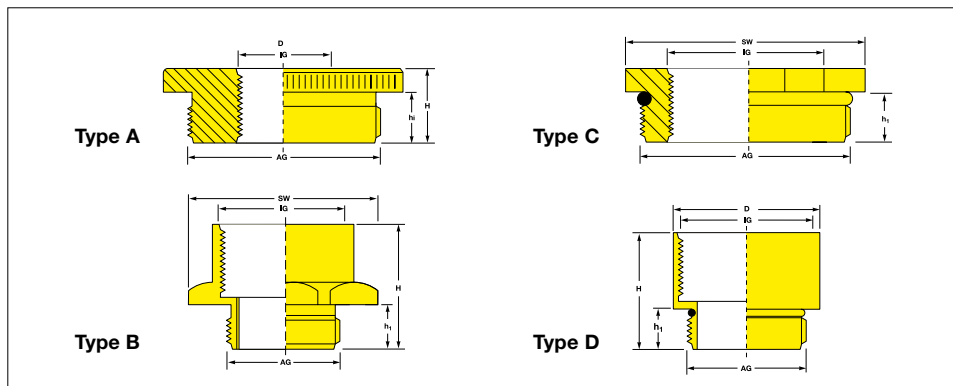

Metric → PG

All dimensions in mm

from	to							Reference-No.
Thread external	Thread internal	Form	Spanner size	Ø outside	Height	Thread length		
AG	IG						SW	
M 12	PG 7	B	SW 14	-	16.0	6.0	EPN 750 / M 12 → PG 7	
M 12	PG 9	D	-	17.0	16.0	5.0	EPN 750 / M 12 → PG 9	
M 16	PG 7	C	SW 17	-	8.0	5.0	EPN 750 / M 16 → PG 7	
M 16	PG 9	B	SW 18	-	17.5	7.0	EPN 750 / M 16 → PG 9	
M 16	PG 11	D	-	20.0	16.5	5.0	EPN 750 / M 16 → PG 11	
M 20	PG 9	C	SW 22	-	9.1	5.9	EPN 750 / M 20 → PG 9	
M 20	PG 11	B	SW 22	-	18.0	6.4	EPN 750 / M 20 → PG 11	
M 20	PG 13.5	B	SW 22	-	19.0	6.5	EPN 750 / M 20 → PG 13.5	
M 20	PG 16	D	-	24.0	19.5	6.0	EPN 750 / M 20 → PG 16	
M 25	PG 9	C	SW 27	-	10.0	7.0	EPN 750 / M 25 → PG 9	
M 25	PG 11	A	-	30.0	12.0	8.0	EPN 750 / M 25 → PG 11	
M 25	PG 13.5	A	-	30.0	10.0	7.0	EPN 750 / M 25 → PG 13.5	
M 25	PG 16	B	SW 27	30.0	18.1	7.0	EPN 750 / M 25 → PG 16	
M 25	PG 21	D	-	30.0	22.5	7.0	EPN 750 / M 25 → PG 21	
M 32	PG 13.5	C	SW 34	-	11.0	8.0	EPN 750 / M 32 → PG 13.5	
M 32	PG 16	A	-	39.0	11.5	8.0	EPN 750 / M 32 → PG 16	
M 32	PG 21	C	SW 34	-	11.1	8.0	EPN 750 / M 32 → PG 21	
M 32	PG 29	D	-	39.0	25.0	8.0	EPN 750 / M 32 → PG 29	
M 40	PG 16	C	SW 43	-	12.0	8.0	EPN 750 / M 40 → PG 16	
M 40	PG 21	C	SW 43	-	12.0	8.0	EPN 750 / M 40 → PG 21	
M 40	PG 29	C	SW 43	-	12.0	8.0	EPN 750 / M 40 → PG 29	
M 40	PG 36	D	-	50.0	27.5	8.0	EPN 750 / M 40 → PG 36	
M 50	PG 21	C	SW 55	-	13.0	9.0	EPN 750 / M 50 → PG 21	
M 50	PG 29	A	-	57.0	12.0	9.0	EPN 750 / M 50 → PG 29	
M 50	PG 36	C	SW 55	-	13.1	9.0	EPN 750 / M 50 → PG 36	
M 50	PG 42	D	-	57.0	31.0	9.0	EPN 750 / M 50 → PG 42	
M 50	PG 48	D	-	64.0	32.0	9.0	EPN 750 / M 50 → PG 48	
M 63	PG 29	C	SW 65	-	14.0	10.0	EPN 750 / M 63 → PG 29	
M 63	PG 36	A	-	70.0	14.5	10.5	EPN 750 / M 63 → PG 36	
M 63	PG 42	A	-	70.0	14.5	10.5	EPN 750 / M 63 → PG 42	
M 63	PG 48	B	SW 65	-	33.0	10.0	EPN 750 / M 63 → PG 48	

Material :
Brass,
nickel plated

Used to adapt from external EN 60423 metric to internal DIN 40430 PG threaded ports.

Think Plastic. Go Protec.®



Should your requirements not be shown please ask for a separate quotation. PROTEC products and specifications are subject to improvement and change without notice.

Quick-Fit® Thread Adapters, Brass, Nickel plated

Used to adapt from metric external thread up to PG internal thread and from PG external thread up to metric internal thread

TRIPLE ADVANTAGE of PROTEC QUICK-FIT®

QUALITY. This component alters the threaded entry diameter on any threaded connector with incompatible thread forms.

AVAILABILITY. With over 400 million moulded components shipped from our UK logistics center we provide the fastest on time delivery service to all industries of the UK market.

PHILOSOPHY. The highest degree of Protec Quick-Fit functionality and safety at the best price in the market.



PG → Metric

from	to	All dimensions in mm					Reference-No.
Thread external	Thread internal	Form	Spanner size	Height	Thread length		
AG	IG		SW	H	h ₁		
PG 7	M 12	B	SW 14	15.0	5.0	EPN 750 / PG 7 → M 12	
PG 9	M 16	B	SW 19	16.0	6.0	EPN 750 / PG 9 → M 16	
PG 11	M 16	B	SW 22	16.0	6.0	EPN 750 / PG 11 → M 16	
PG 13.5	M 20	B	SW 24	17.0	7.0	EPN 750 / PG 13.5 → M 20	
PG 16	M 20	B	SW 27	17.5	6.5	EPN 750 / PG 16 → M 20	
PG 16	M 25	B	SW 27	18.0	7.0	EPN 750 / PG 16 → M 25	
PG 21	M 25	A	–	10.0	7.0	EPN 750 / PG 21 → M 25	
PG 21	M 32	B	SW 36	19.5	8.0	EPN 750 / PG 21 → M 32	
PG 29	M 40	B	SW 42	20.0	8.5	EPN 750 / PG 29 → M 40	
PG 36	M 50	B	SW 55	21.0	8.5	EPN 750 / PG 36 → M 50	
PG 42	M 63	B	SW 65	25.0	10.0	EPN 750 / PG 42 → M 63	

Material :
Brass,
nickel plated

Individual Productions :
On request we develop and produce individually tailored solutions next to the standard items of this range: additional dimensions, different materials and new colours

We would be pleased to advise you.

Think Plastic. Go Protec.®



Should your requirements not be shown please ask for a separate quotation. PROTEC products and specifications are subject to improvement and change without notice.